


Protractor Smart

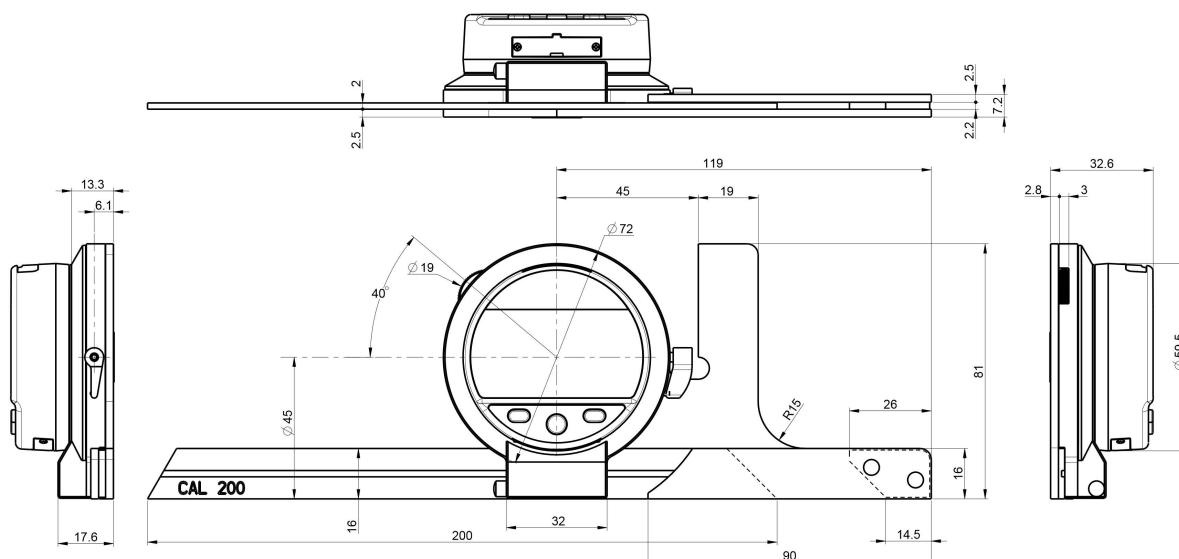

	820-1706
EAN	7,64013E+12
Measuring range	1×360°, 2×180°, 4×90°
Accuracy	4 minutes of arc / 0.06° / 0.0012 rad
Resolution	0.01° / 1 minute of arc (0°01') / 0.0001rad
Repeatability	0.01°
Max. rotation speed	1080° / sec
Protection rating according to IEC 529	IP54
Output data	Bluetooth® wireless technology / USB / RS232
Functions	Unit (dEG, rAd or d-M), reference, Preset, Measurement direction, mode MIN/MAX/DELTA, tolerance display, switch off, keypad lock